

Keep in a safe and dry place for future reference.

Model Number of your woofer _____

Serial Number _____

Place of purchase _____

Notes _____

Your enclosure data (circle one)


Sealed Vented Bandpass Other

Total airspace _____

Enclosure Dimensions _____

Port type, area and length (if available) _____

drawing pad

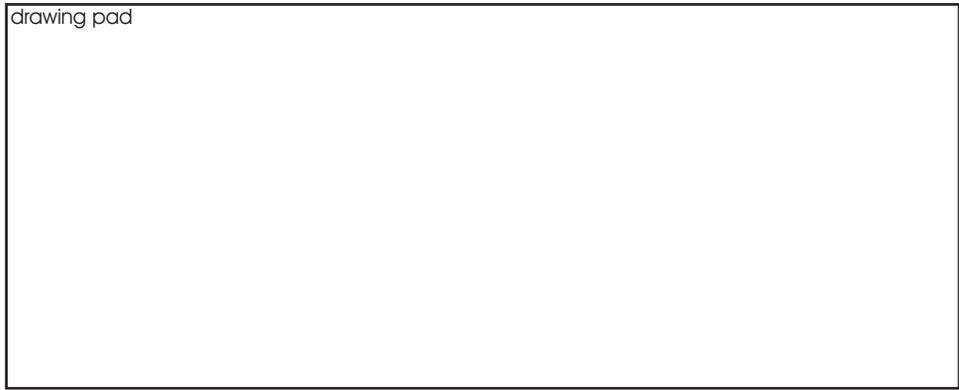

Soundstream Technologies
1550 S. Maple Ave.
Montebello, CA 90640 USA
PH: 323.724.4600 FX: 323.722.8125
www.soundstream.com

SOUNDSTREAM

T E C H N O L O G I E S

XW SERIES WOOFER

OWNERS MANUAL



www.SOUNDSTREAM.com

Congratulations and thank you for purchasing Soundstream products. We are confident you will enjoy your new subwoofer and appreciate the effort involved in bringing you the best engineered and crafted subwoofer in this category. Harmonic indulgence...Listen and feel.

We advise you to keep this manual in a safe and dry place. Write down any important information to reference from in the future, such as all of your enclosure information. Draw a simple diagram and write all the parameters of the enclosure incase you ever need to reference from it in the future.

Specifications

Model	XW-10 & 10/2	XW-12 & 12/2
Mounting Depth	*4.5"	*5.125"
Outer Diameter	*10.375"	*12.625"
Cutout Diameter	9"	11.125"
Driver Displacement	.07 cu.ft.	.09 cu. ft.
Impedance	Dual 4 ohm/Dual 2 ohm	Dual 4 ohm/Dual 2 ohm
RMS Power	125 watts	150 watts
MAX Power	250 watts	300 watts
PEAK Power	500 watts	600 watts
Voice Coil	2"	2"
Magnet Weight	40 oz	40 oz.
Frequency Response	30 - 500Hz	30 - 500Hz
Resonant Frequency	38.469Hz	35.279Hz
Qts	.736	.806
Qms	8.514	7.619
Qes	.806	.902
Vas	18.880 ltr	52.208 ltr
XMAX	9.35 mm	9.35 mm
SPL	83.1 dB	85.9 dB

* These numbers are measured with the cosmetic rubber gasket in place. Please measure the driver yourself for precise dimensions or if necessary with out the gasket.

NOTICE

The following enclosure recommendations are only a few in variation of what the woofer requires. If you need specific information for a design and have questions regarding it, please contact our Technical Support Department with your details, via email at tech-support@soundstream.com. We strongly suggest you use or build an enclosure with in the following parameters for proper function and quality results from your woofer. Building an enclosure too far from the specified suggestions may cause undesired performance and/or damage to your woofer and in some cases your amplifier as well.

Sealed Enclosure Recommendations for XW-10 & 10/2

Optimum Enclosure

NET Volume	.9 cuft / 25.5 ltrs
Enclosure Q	.605
Max Power	250 watts
Fill	50% Loose

Other Enclosure Recommendations

	Volume	MAX Power
Smallest	.5 cuft / 14.16 ltrs	250 watts
Largest	1.4 cuft / 39.64 ltrs	200 watts

All volume suggestions are "Net Volume" before any displacement. Please add accordingly to your design

Sealed Enclosure Recommendations for XW-12 & 12/2

Optimum Enclosure

NET Volume	1 cuft / 28.3 ltrs
Enclosure Q	.616
Max Power	250 watts
Fill	50% Loose

Other Enclosure Recommendations

	Volume	MAX Power
Smallest	.7 cuft / 19.82 ltrs	250 watts
Largest	1.5 cuft / 42.48 ltrs	200 watts

All volume suggestions are "Net Volume" before any displacement. Please add accordingly to your design

Vented Enclosure Recommendations for XW-10 & 10/2

Optimum Enclosure

NET Volume	1.2 cuft / 34 ltrs
Vent Design	3" X 7.375"
Tuning Freq	40Hz
Max Power	250 watts

Other Enclosure Recommendations

NET Volume	1.8 cuft / 51 ltrs
Vent Design	20 sqin X 14.5"
Tuning Freq	40Hz
Max Power	200 watts

All volume suggestions are "Net Volume" before any displacement. Please add accordingly to your design

All volume suggestions are "Net Volume" before any displacement. Please add accordingly to your design

Vented Enclosure Recommendations for XW-12 & 12/2

Optimum Enclosure

NET Volume	1.5 cuft / 42.48 ltrs
Vent Design	4" X 12.25"
Tuning Freq	38Hz
Max Power	250 watts

Other Enclosure Recommendations

NET Volume	2.25 cuft / 63.2 ltrs
Vent Design	20 sqin X 14"
Tuning Freq	36Hz
Max Power	225 watts

All volume suggestions are "Net Volume" before any displacement. Please add accordingly to your design

All volume suggestions are "Net Volume" before any displacement. Please add accordingly to your design

Wiring Configurations

There are a variety of impedance possibilities when using woofers equipped with multiple coils. It is "EXTREMELY" important that ALL coils are used and none are left as spares. Always provide the minimum impedance your amplifier requires. If you need assistance with wiring configurations, please consult a professional installer or contact our Technical Support Department with your questions.